


Motorized sheet metal shear **MGS**



T e c h n i c a l D a t a s h e e t

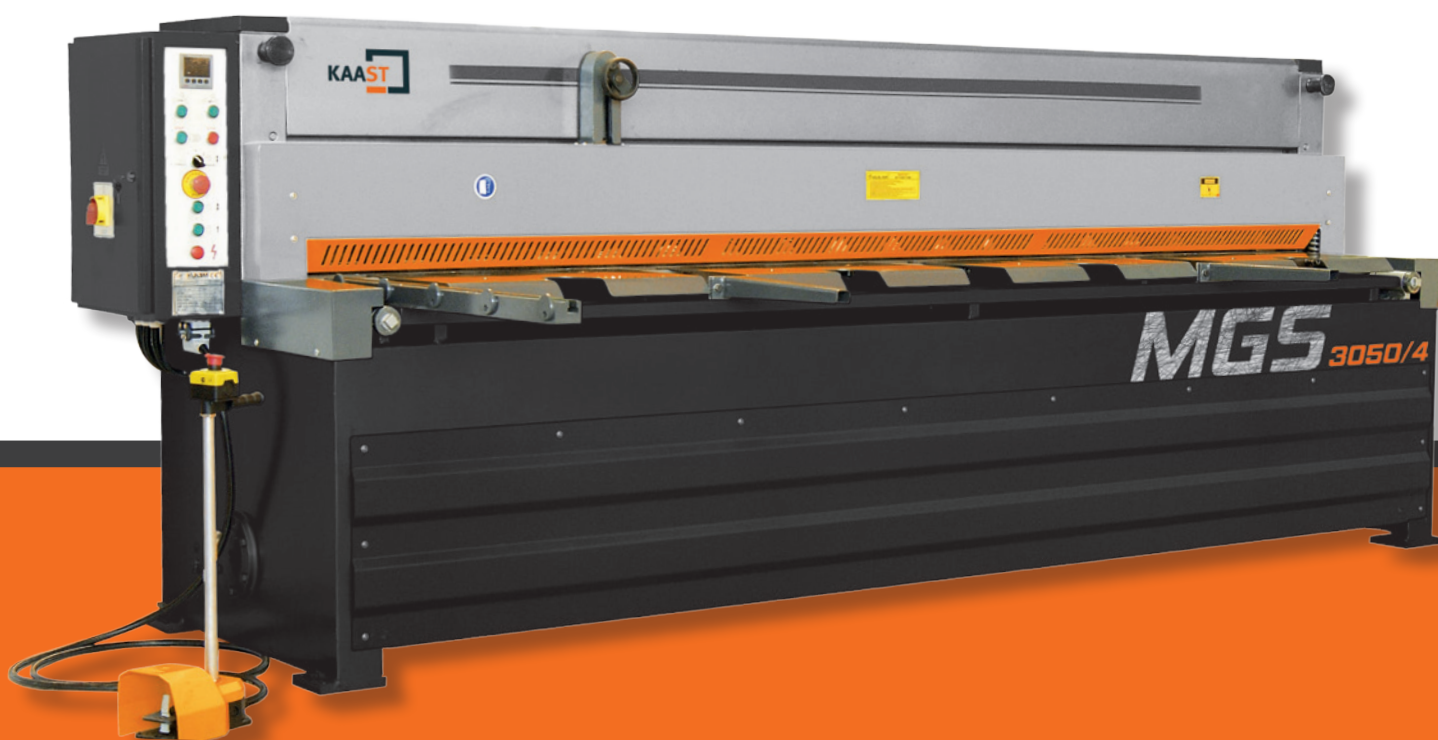

- Heavy welded structure for better machine rigidity
- Low-noise drive
- Parallel guided, high-strength alloy steel blades, hardened and ground

Optional configuration:

- Cutting line illumination
- Light curtain
- Pneumatic thin sheet support system
- 180° angle gauge
- 1000 mm NC backgauge system
- 750 mm backgauge (for MGS 1350/3, 2050/3 & 2550/2,5)
- Piece counter
- Special blades

Standard configuration:

- ✓ Set of blades
- ✓ Side fence and 2 front support arms
- ✓ Hold-down system
- ✓ Selector switch for single and continuous stroke
- ✓ Footswitch and safety equipment according to CE Norm
- ✓ Motorized back gauge 750mm (all 4 mm models)
- ✓ Support table (all 4 mm models)
- ✓ Manual



Technical specifications		MGS					
		1350/3	2050/3	2050/4	2550/2,5	2550/4	3050/4
Max. material thickness St. 42	mm	3 (0.11")	3 (0.11")	4 (0.15")	2.5 (0.09")	4 (0.15")	4 (0.15")
Max. cutting length	mm	1300 (51")	2000 (78")	2000 (78")	2550 (100")	2550 (100")	3050 (120")
Cutting angle	degree	2°40'	1°60'	1°30'	1°30'	1°30'	1°30'
Cutting strokes per minute	1/min	33	33	42	33	42	42
Main drive power	kW	4 (5 Hp)	4 (5 Hp)	7.5 (10 Hp)	4 (5 Hp)	7.5 (10 Hp)	7.5 (10 Hp)
Backgauge	mm	560 (22")	560 (22")	750 (29")	560 (22")	750 (29")	750 (29")
Dimensions (LxWxH)	mm	1900x1400x1250 (74x55x49")	2600x1400x1250 (102x55x49")	2700x1800x1400 (106x70x55")	3100x1400 x1250 (122x55x49")	3200x1800x1400 (125x70x55")	3700x1800x1400 (145x70x55")
Weight	kg	1300 (2860 lbs)	1800 (3960 lbs)	3150 (6930 lbs)	1950 (4290 lbs)	3600 (7920 lbs)	4000 (8800 lbs)
Item-No.		9221001	9221002	9221003	9221004	9221005	9221006

*The above specifications are subject to change without prior notice, no liability for printing mistakes. Machine may be shown with optional equipment.