


Rapid Radial Drilling Machine

RDS 40 A



Universal Radial Drill with 2 workspaces

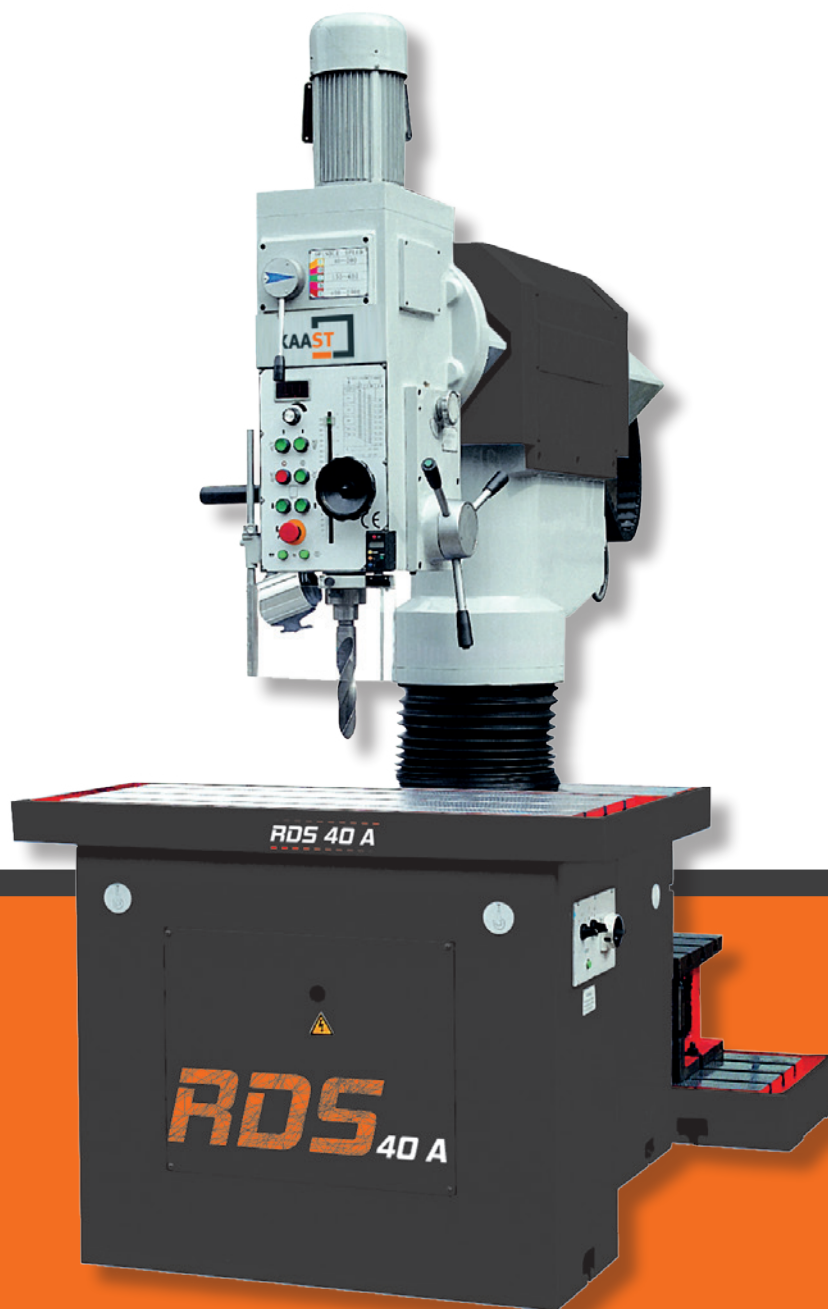

T e c h n i c a l D a t a s h e e t

- High operating convenience through digital spindle speed display and stepless speed control
- Automatic quill feed
- Thread cutting function
- Versatile swivel ranges of 180° at the drill head and 90° at the back table

Standard configuration:

- ✓ Digital spindle speed display
- ✓ Digital quill travel indicator
- ✓ Horizontal table
- ✓ Tilttable table
- ✓ Cube table
- ✓ Baseplate
- ✓ Working area illumination
- ✓ Coolant system
- ✓ Thread tapping function
- ✓ Drill chuck
- ✓ Reducing sleeve
- ✓ Operating tools
- ✓ Manual



Technical specifications	RDS 40 A	Technical specifications	RDS 40 A
Drilling capacity	Ø40 mm	Arm swiveling range	360°
Tapping capacity	M 30	Spindle taper	MT 4
Horizontal table dimensions	1200x505 mm	Spindle speed (inf. variable)	50-2000rpm
T-slots	3x18 mm	Quill feed	(6) 0.08–0,5 mm/rev
Max. distance spindle-table	760 mm	Column diameter	Ø220 mm
Vertical column travel	400 mm	Main drive motor	2.2 kW
Arm travel	590 mm	Vertical travel motor	1.5 kW
Quill travel	200 mm	Coolant supply motor	0.37 kW
Projection	560 mm	Dimensions (LxWxH)	1910x1200x2400 mm
Drilling head tilt angle	±90°	Weight	2800 kg
Item-No.			2500002

*The above specifications are subject to change without prior notice, no liability for printing mistakes. Machine may be shown with optional equipment.